


ameritemp™

TLC-1400 Solid State Liquid Chiller




Standard Features:

- g 430 Watt Capacity
- g PID Temperature Control
- g Fluid Quick Connects
- g Stainless Steel housing
- g LowFluid/FlowWarning
- g External Plumbing

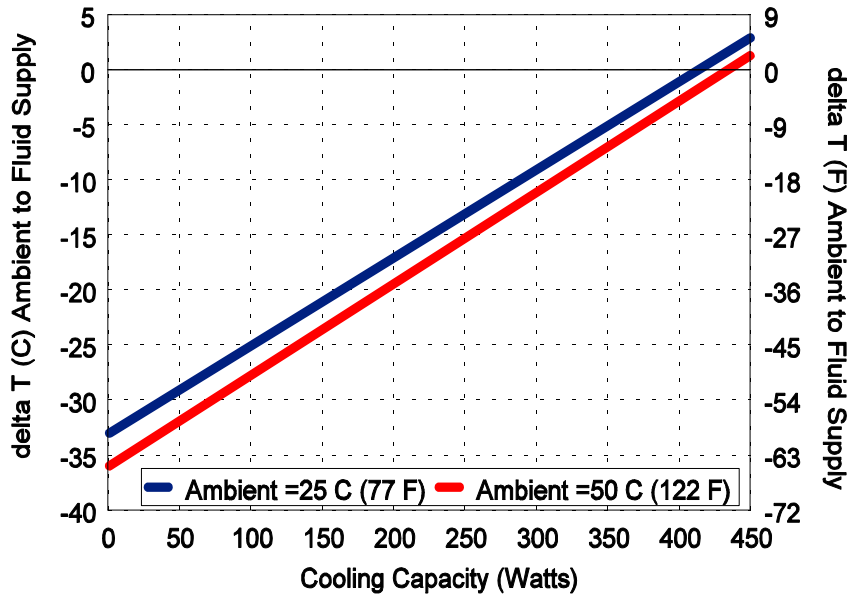

Model Number	Part Number	Voltage (Volts)	Current (Amps RMS)	Frequency (Hz)	Weight Kg(Lbs)	Maximum Ambient	Heating Option (HC suffix)
TLC-1400	6-B0D0-0-000	120 VAC	7.0	50/60	26.7(59)	50EC(+122EF)	400 Watt
TLC-1400HC	6-B0D0-1-000						
TLC-1402	6-B0D2-0-000	240 VAC	4.0				
TLC-1402HC	6-B0D2-1-000						
Control Stability	Control	Housing	Liquid Jacket	Reservoir Capacity	Pump Flow	External Plumbing Provided with Shipment	Size (Inches)
< +/- 0.5EC	Digital Display 0.1EC Indication	Stainless Steel Type 304	Aluminum Type 6063	500 mL 0.13 Gal	2 ½ LPM (.66 GPM) Open Flow Full Curve Available	6 Foot Supply & Return Reinforced 3/8" ID PVC Tubing with Insulation	13.0 x 14.4 x 12.2

TECA's Ameritemp™ Series Chillers are a compact and reliable alternative to conventional recirculating coolers. A complete integrated package is now offered in a standard configuration. Precise temperature control and external plumbing lines with quick connectors are included with our base model. Options such as heating, RS-232 interface & Computer Communications software are offered as well. The Ameritemp™ is ideal for bench-top or portable applications such as laboratory, laser, x-ray, out-patient and medical therapy as well as many others.

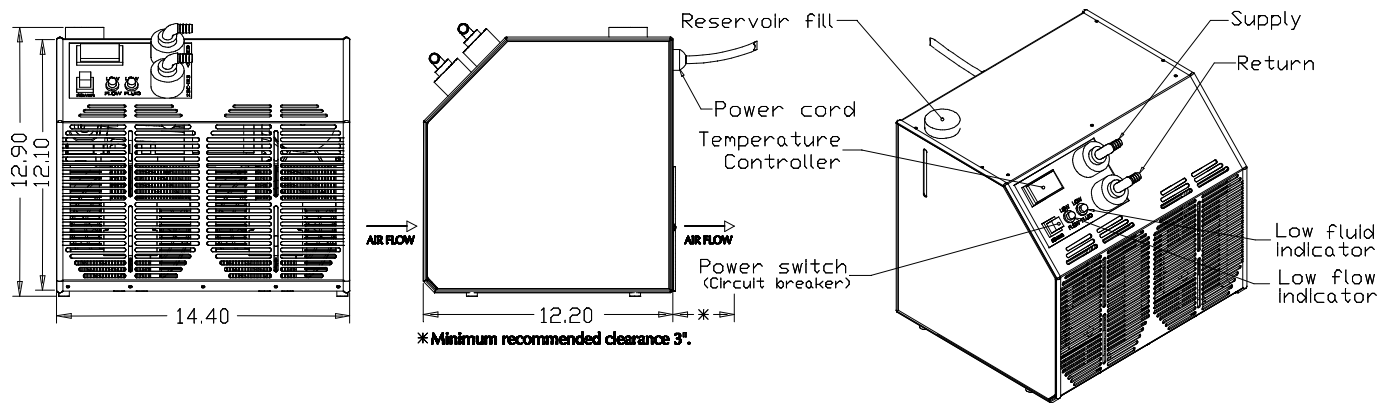

Dimensions are in inches

Call us toll free at 888-TECA-USA (832-2872)

ThermoElectric Cooling America Corporation • 4048 W. Schubert Ave. • Chicago IL (USA) 60639
 Phone: 773-342-4900 Fax: 773-342-0191 • www.thermoelectric.com • teca@thermoelectric.com