


# RLC-1400 Rack Mount Liquid Chiller

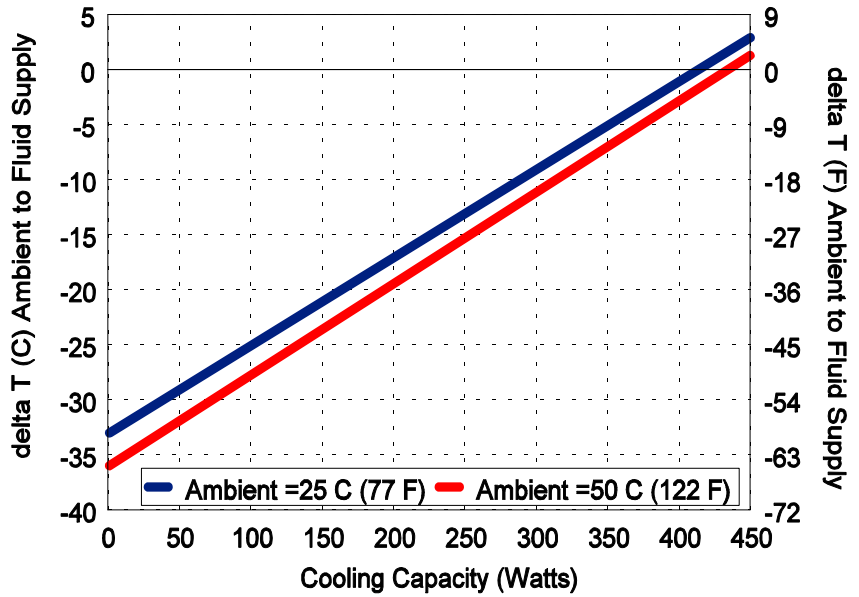

**Standard Features:**

- g 430 Watts Capacity
- g PID Temperature Control
- g Fluid Quick Connects
- g 19" Rack Mountable
- g Stainless Steel housing
- g Low Fluid/Flow Warning
- g External Plumbing
- g Remote Sense Capability

Model Number	Part Number	Voltage (Volts)	Current (Amps RMS)	Frequency (Hz)	Weight Kg(Lbs)	Maximum Ambient	Heating Option (HC suffix)
RLC-1400	8-B0D0-0-000	120 VAC	7.0	50/60	26.7(59)	50EC(+122EF)	400 Watt
RLC-1400HC	8-B0D0-1-000	240 VAC	4.0				
RLC-1402	8-B0D2-0-000						
RLC-1402HC	8-B0D2-1-000						
Control Stability	Control	Housing	Liquid Jacket	Reservoir Capacity	Pump Flow	External Plumbing Provided with Shipment	Size (Inches)
< +/- 0.5EC	Digital Display 0.1EC Indication	Stainless Steel Type 304	Aluminum Type 6063	1000 mL 0.25 Gal	2 1/2 LPM (.66 GPM) Open Flow Full Curve Available	6 Foot Supply & Return Reinforced 3/8" ID PVC Tubing with Insulation	19.0 x 25.0 x 8.8

**TECA** Liquid chillers are a compact and reliable alternative to conventional recirculating coolers. A complete integrated package is now offered in a rack mount configuration. Precise temperature control and internal plumbing lines with quick connectors are included with our base models. Options such as heating, RS-232 interface & Computer Communications software are offered as well. Ideal for rack mount applications such as laboratory, laser, x-ray, out-patient and medical therapy as well as many others.

