



AHP-3252

Air Conditioner/Heat Exchanger

Air Cooled
Through Mounted
Nema-12, 4, 4X

240 VAC Input
High Efficiency
2610 BTU/HR

FEATURES

- High capacity thermoelectric design
- Power saving air to air heat exchanger mode (ECO-Mode)
- Heavy duty full perimeter mounting
- Lower profile intrusion into enclosure
- Central input cord for easy mounting
- Closed loop design
- Condensate control and evaporation system
- Increased efficiency at higher ambients by as much as 10%
- Virtually maintenance free
- No compressor
- Environmental1y friendly and safe
- Stainless Steel exterior housing
- Mounts and operates in any orientation
- Integral temperature controller
- Agency approvals:
- UL 60335-1 & 2-40; CSA C22.2#60335-1 & 2-40; IEC 60335-1 & 2-40

CONTROL TEMPERATURES

Active Cooling	35 °C
Heat Exchanger (ECO-Mode)	25 °C
Active Heating	10 °C
Typical Hysteresis	5 °C
Operating Ambient	-40/+65 °C
Operating Enclosure	-10/+60 °C

POWER INPUTS

Voltage	240 VAC
Current, Active	4.6 AMPS
Current , ECO-Mode	0.70 AMP
Frequency	50/60 Hz

PERFORMANCE RATINGS

Cooling (Traditional)	2610 BTU/HR
Cooling (Din 3168)	765 WATTS
Cooling COP (at L35 L35)	0.70
Heating (Traditional)	> 3765 BTU/HR
Heating (Din 3168)	> 1104 WATTS
Heating COP	> 1.0
Heat Exchanger (ECO-Mode)	18 W/°C

CONFIGURATIONS


MODEL	PART NUMBER	NOTES	TEMPERATURE CONTROL	ENVIRONMENT
AHP-3252	0-14J2-0-000	Cool only, industrial fans & power supply	TC-4F	NEMA-12, IP 52
AHP-3252	0-14S2-0-000	Cool only, industrial fans & power supply	EXT*	NEMA-12, IP 52
AHP-3252HC	0-14I2-1-000	Heat/Cool, industrial fans & power supply	TC-7F	NEMA-12, IP 52
AHP-3252HC	0-14S2-1-000	Heat/Cool, industrial fans & power supply	EXT*	NEMA-12, IP 52
AHP-3252XE	0-14J2-4-000	Cool only, sealed hot side fans & power supply	TC-4F	NEMA-4/4X, IP 56
AHP-3252XE	0-14S2-4-000	Cool only, sealed hot side fans & power supply	EXT*	NEMA-4/4X, IP 56
AHP-3252XEHC	0-14I2-5-000	Heat/Cool, sealed hot side fans & power supply	TC-7F	NEMA-4/4X, IP 56
AHP-3252XEHC	0-14S2-5-000	Heat/Cool, sealed hot side fans & power supply	EXT*	NEMA-4/4X, IP 56
AHP-3252X	0-14J2-2-000	Cool only, Mil. grade hot side fans & power supply	TC-4F	NEMA-4X/Harsh, IP 56
AHP-3252X	0-14S2-2-000	Cool only, Mil. grade hot side fans & power supply	EXT*	NEMA-4X/Harsh, IP 56
AHP-3252XHC	0-14I2-3-000	Heat/Cool, Mil. grade hot side fans & power supply	TC-7F	NEMA-4X/Harsh, IP 56
AHP-3252XHC	0-14S2-3-000	Heat/Cool, Mil. grade hot side fans & power supply	EXT*	NEMA-4X/Harsh, IP 56

* Unit is set for 5-32 VDC external signal, relay(s) included



INCLUDES

- Power supply
- Temperature controller
- Power saving heat exchanger mode (ECO-Mode)
- Mounting gasket
- Mounting hardware
- Power input cord
- Circuit breaker

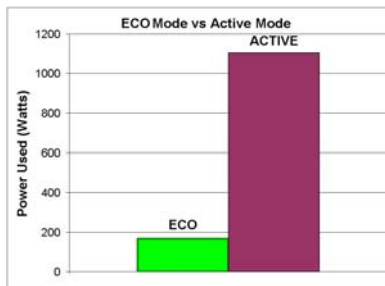

250 VDC configuration for crane applications available



AHP-3252**MOUNTING STYLE**

Through Mounted

ENVIRONMENTS SERVED

NEMA-12 IP 52

NEMA-4,4X IP 56

RATING (TRADITIONAL)


2610 BTU/hr @ 0 °F ΔT

3515 BTU/hr @ +20 °F ΔT

RATING (DIN 3168)


765 Watts L35 L35

430 Watts L35 L50

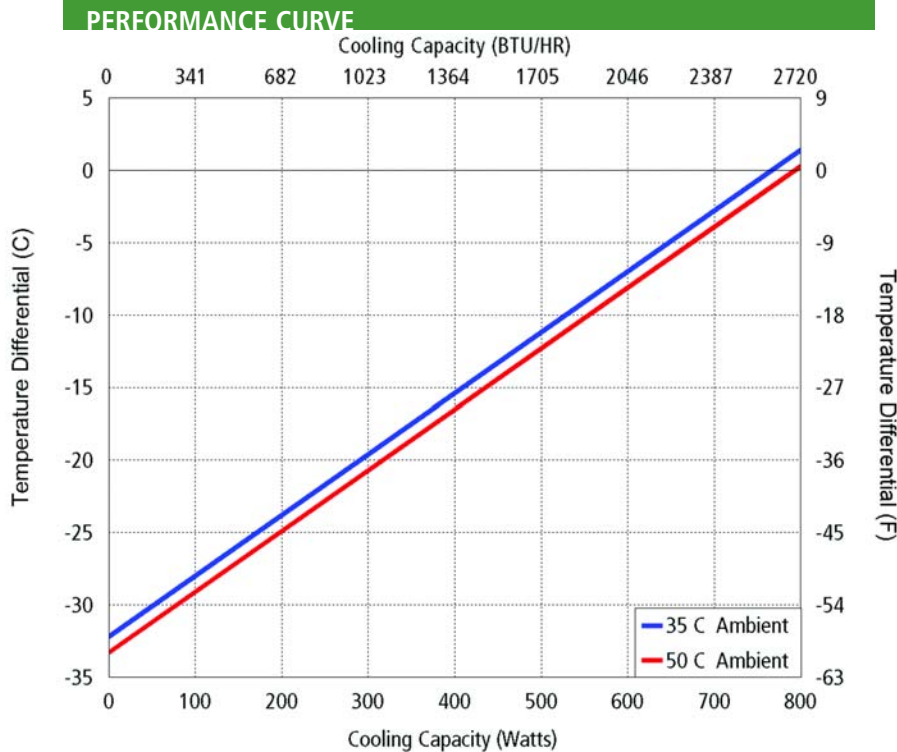


Equation of line: $y = \Delta T(^{\circ}\text{C})$ $x = \text{Capacity (Watts)}$		
Ambient Temp	35°C	50°C
Enclosure Air	$y = .042x - 32.2$	$y = .042x - 33.3$
Cold Sink	$y = .031x - 32.2$	$y = .031x - 33.3$

Temperature Differential (F)

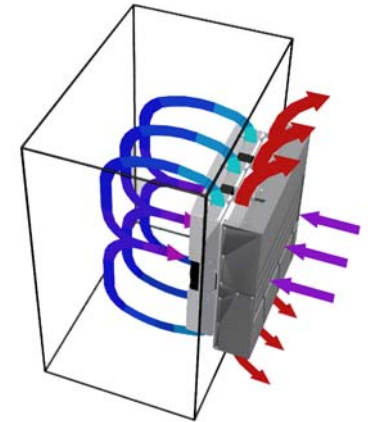

Air Flow Pattern

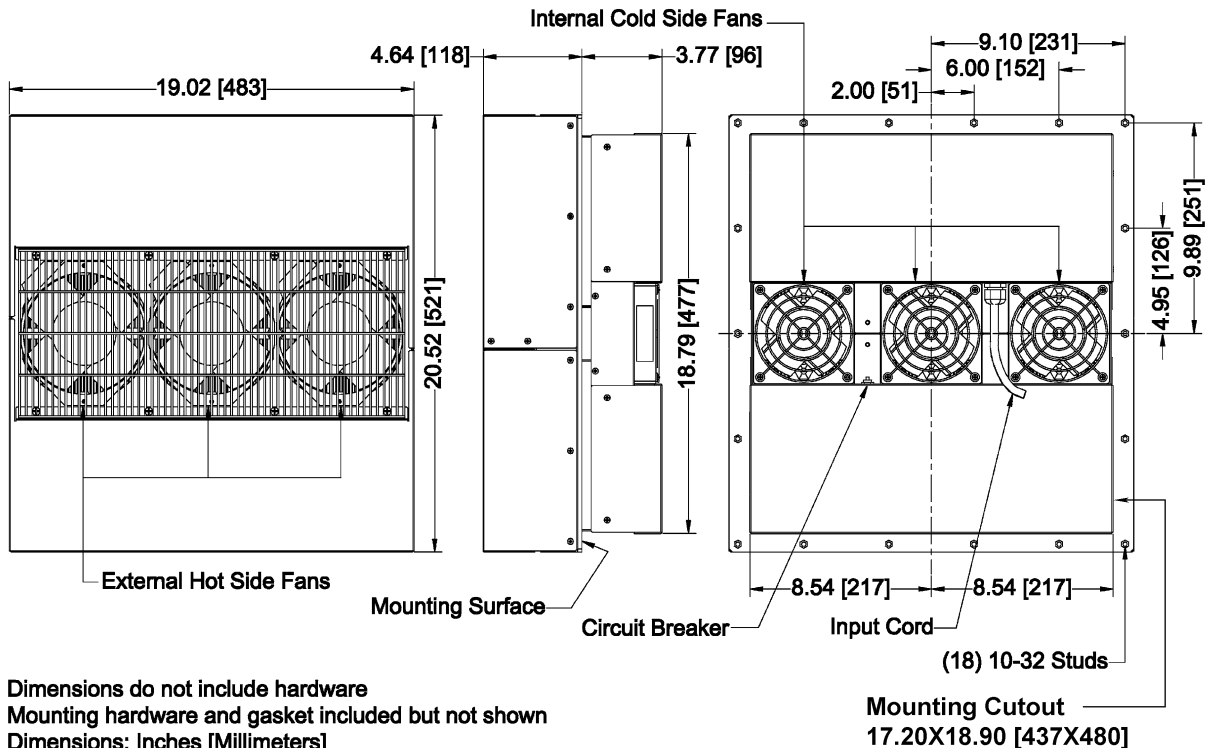DIMENSIONS

Dimensions do not include hardware
 Mounting hardware and gasket included but not shown
 Dimensions: Inches [Millimeters]