

FHP-3250

Air Conditioner/Heat Exchanger

Air Cooled
Flush Mounted
Nema-12, 4, 4X

48 VDC Input
High Capacity
2095 BTU/HR

FEATURES

- High capacity thermoelectric design
- Power saving air to air heat exchanger mode (ECO-Mode)
- Heavy duty full perimeter mounting
- No intrusion into enclosure
- Central input cord for easy mounting
- Closed loop design
- Condensate control and evaporation system
- Increased efficiency at higher ambients
- Virtually maintenance free
- No compressor
- Environmentally friendly and safe
- Stainless Steel exterior housing
- Mounts and operates in any orientation
- Integral temperature controller
- Weight 93 LBS.

CONTROL TEMPERATURES

Active Cooling	35 °C
Heat Exchanger (ECO-Mode)	25 °C
Active Heating	10 °C
Typical Hysteresis	5 °C
Operating Ambient	-40/+65 °C
Operating Enclosure	-10/+60 °C

POWER INPUTS

Voltage	48 VDC
Current, Active	22 AMPS
Current , ECO-Mode	1.4 AMP

PERFORMANCE RATINGS

Cooling (Traditional)	2095 BTU/HR
Cooling (Din 3168)	672 WATTS
Cooling COP (at L35 L35)	0.58
Heating (Traditional)	> 2095 BTU/HR
Heating (Din 3168)	> 672 WATTS
Heating COP	> 1.0
Heat Exchanger (ECO-Mode)	18 W/°C

CONFIGURATIONS


MODEL	PART NUMBER	NOTES	TEMPERATURE CONTROL	ENVIRONMENT
FHP-3250	7-15J6-0-000	Cool only, industrial fans & power supply	TC-4F	NEMA-12, IP 52
FHP-3250	7-1556-0-000	Cool only, industrial fans & power supply	EXT*	NEMA-12, IP 52
FHP-3250HC	7-15I6-1-000	Heat/Cool, industrial fans & power supply	TC-7F	NEMA-12, IP 52
FHP-3250HC	7-1556-1-000	Heat/Cool, industrial fans & power supply	EXT*	NEMA-12, IP 52
FHP-3250XE	7-15J6-4-000	Cool only, sealed hot side fans & power supply	TC-4F	NEMA-4/4X, IP 56
FHP-3250XE	7-1556-4-000	Cool only, sealed hot side fans & power supply	EXT*	NEMA-4/4X, IP 56
FHP-3250XEHC	7-15I6-5-000	Heat/Cool, sealed hot side fans & power supply	TC-7F	NEMA-4/4X, IP 56
FHP-3250XEHC	7-1556-5-000	Heat/Cool, sealed hot side fans & power supply	EXT*	NEMA-4/4X, IP 56
FHP-3250X	7-15J6-2-000	Cool only, Mil. grade hot side fans & power supply	TC-4F	NEMA-4X/Harsh, IP 56
FHP-3250X	7-1556-2-000	Cool only, Mil. grade hot side fans & power supply	EXT*	NEMA-4X/Harsh, IP 56
FHP-3250XHC	7-15I6-3-000	Heat/Cool, Mil. grade hot side fans & power supply	TC-7F	NEMA-4X/Harsh, IP 56
FHP-3250XHC	7-1556-3-000	Heat/Cool, Mil. grade hot side fans & power supply	EXT*	NEMA-4X/Harsh, IP 56

* Unit is set for 5-32 VDC external signal, relay(s) included



INCLUDES

- Temperature controller
- Power saving heat exchanger mode (ECO-Mode)
- Mounting gasket
- Mounting hardware
- Power input leads
- Circuit breaker

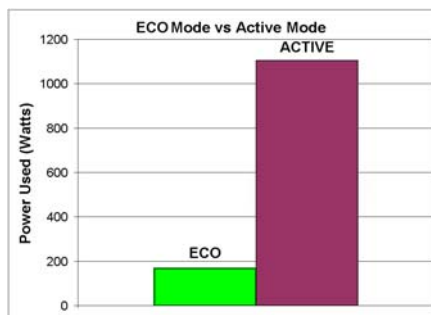

250 VDC configuration for crane applications available

FHP-3250**MOUNTING STYLE**

Flush Mounted

ENVIRONMENTS SERVED

NEMA-12 IP 52

NEMA-4,4X IP 56


RATING (TRADITIONAL)

2095 BTU/hr @ 0 °F ΔT


RATING (DIN 3168)

614 Watts L35 L35


302 Watts L35 L50

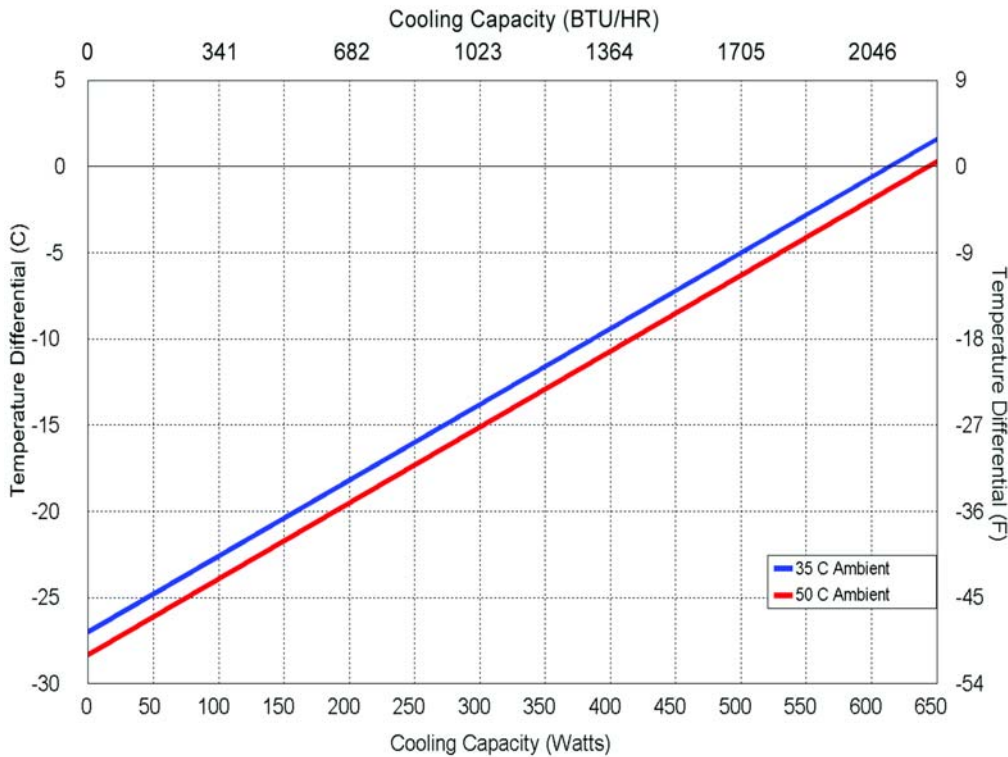

Equation of line: $y = \Delta T(^{\circ}\text{C})$ $x = \text{Capacity (Watts)}$		
Ambient Temp	35°C	50°C
Enclosure Air	$y = .044x - 27$	$y = .044x - 28.3$
Cold Sink	$y = .032x - 27$	$y = .032x - 28.3$

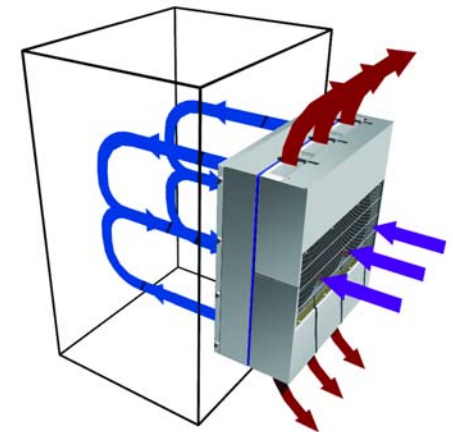

Air Flow Pattern

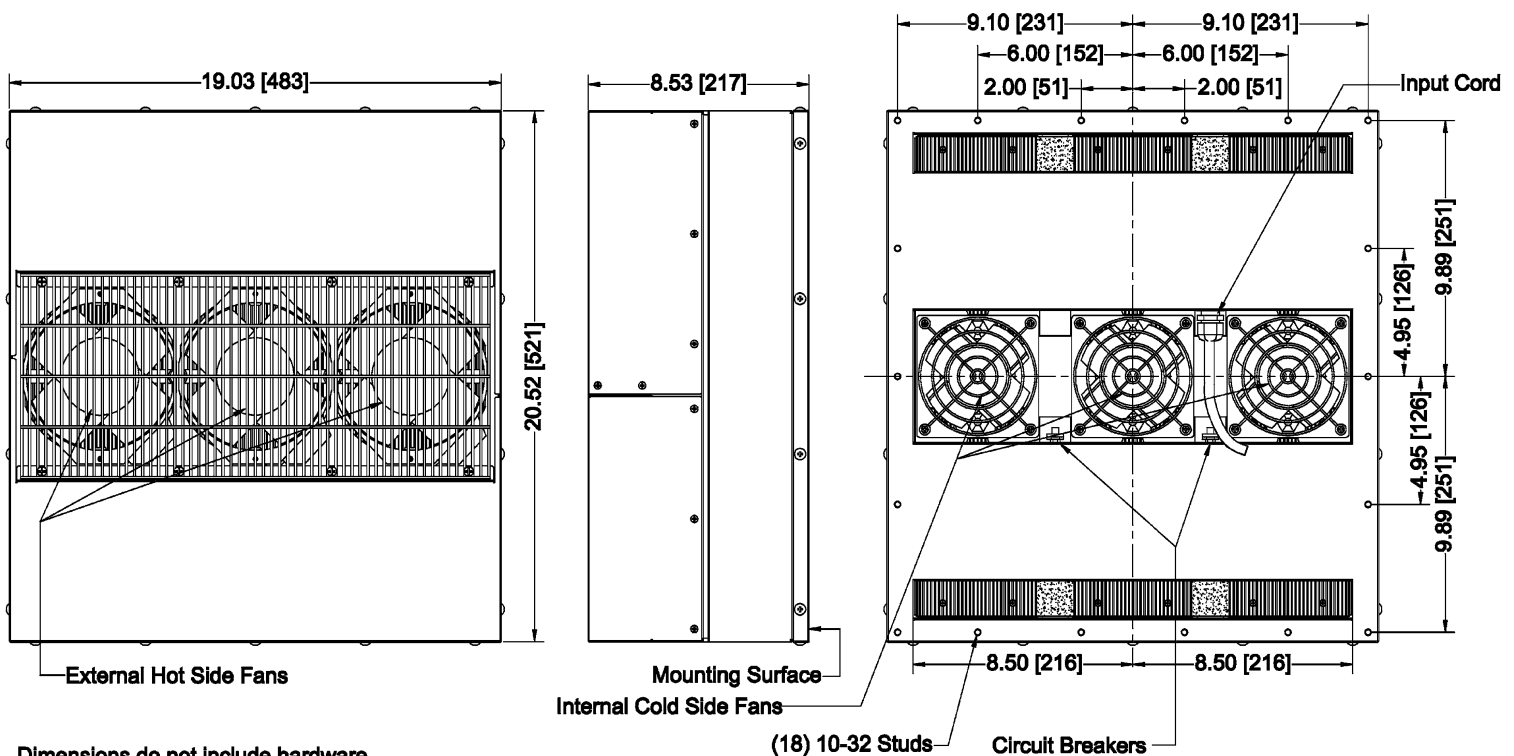DIMENSIONS

Dimensions do not include hardware
 Mounting hardware and gasket included but not shown
 Dimensions: Inches [Millimeters]

Mounting Cutout: 17.20X18.90 [437X480]