



LOW TEMPERATURE CASCADES FOR USE WITH LIQUID CHILLERS

One thermoelectric stacked on top of another with the goal of increasing the maximum temperature differential is a "cascade". Use these assemblies with the liquid chiller to create 2 and 3 stage cascades. The performance will vary with the degree of insulation, with the amount of the active load and with the ambient temperature.


TWO STAGE - LARGE PLATE

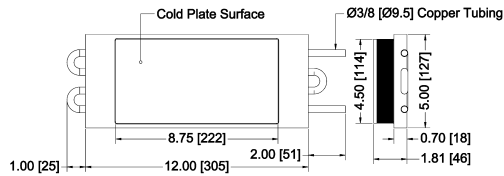


TWO STAGE - SMALL PLATE

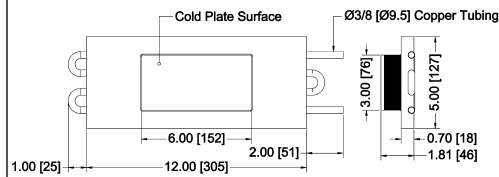


THREE STAGE

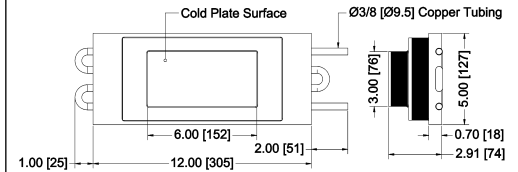

LCP-22

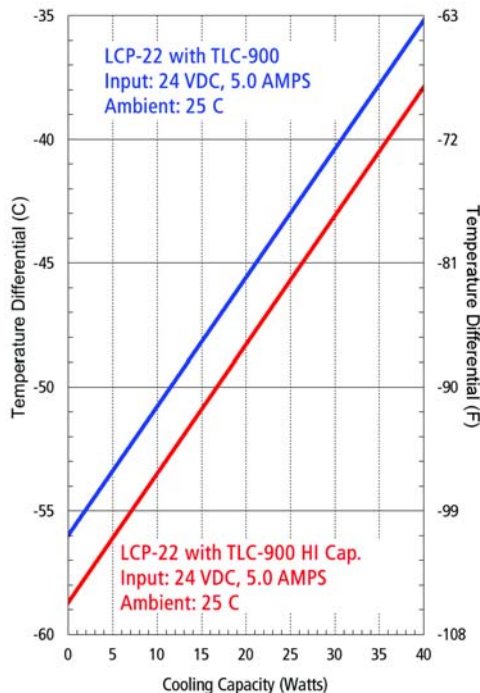

LCP-21

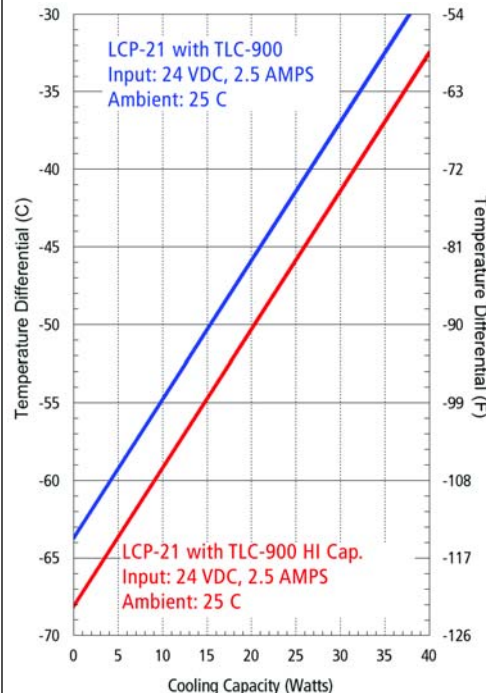

LCP-31

