

# AHP-2259 | Air Conditioner/Heat Exchanger

Air Cooled Through Mounted Nema-12, 4

100 - 240 VAC Input High Efficiency 1330 BTU/HR

#### **FEATURES**

- High efficiency thermoelectric design
- Power saving air to air heat exchanger mode (ECO-Mode)
- Heavy duty full perimeter mounting
- Lower profile intrusion into enclosure
- Central input cord for easy mounting
- Closed loop design
- Condensate control and evaporation system
- Compact
- Increased efficiency at higher ambients by as much as 10%
- Virtually maintenance free
- No compressor
- Environmentaly friendly and safe
- Stainless Steel exterior housing
- Mounts and operates in any orientation
- Integral temperature controller
- Weight 55 LBS.

#### **INCLUDES**

- Power supply
- Temperature controller
- Power saving heat exchanger mode (ECO-Mode)
- Mounting gasket
- Mounting hardware
- Power input cord

# **CONTROL TEMPERATURES**


35 °C Active Cooling Heat Exchanger (ECO-Mode) 25 °C 10 °C Active Heating Typical Hysteresis 5°C -40/+65 °C Operating Ambient Operating Enclosure -10/+60 °C

#### **POWER INPUTS**

Input Voltage 100 - 240 VAC Current, Active 3.0 - 1.3 AMPS 127 - 374 VDC Alternate Input voltage Current, ECO-Mode 1 AMP Frequency 47 - 63 / 440 Hz 320 Watts Power Consumption

### PERFORMANCE RATINGS

Cooling (Traditional) 1330 BTU/HR Cooling (Din 3168) 390 WATTS Cooling COP (at L35 L35) 1.35 Heating (Traditional) > 980 BTU/HR Heating (Din 3168) > 290 WATTS Heating COP > 1.0 Heat Exchanger (ECO-Mode) 12.5 W/°C




200 - 277 VAC (254 - 420 VDC) Versions available

CONFIGURATIONS				
MODEL	PART NUMBER	NOTES	TEMPERATURE CONTROL	ENVIRONMENT
AHP-2259	0-H4JB-0-000	Cool only, industrial fans	TC-4F	NEMA-12, IP 52
AHP-2259	0-H45B-0-000	Cool only, industrial fans	EXT*	NEMA-12, IP 52
AHP-2259HC	0-H4IB-1-000	Heat/Cool, industrial fans	TC-7F	NEMA-12, IP 52
AHP-2259HC	0-H45B-1-000	Heat/Cool, industrial fans	EXT*	NEMA-12, IP 52
AHP-2259XE	0-H4JB-4-000	Cool only, sealed hot side fans	TC-4F	NEMA-4, IP 56
AHP-2259XE	0-H45B-4-000	Cool only, sealed hot side fans	EXT*	NEMA-4, IP 56
AHP-2259XEHC	0-H4IB-5-000	Heat/Cool, sealed hot side fans	TC-7F	NEMA-4, IP 56
AHP-2259XEHC	0-H45B-5-000	Heat/Cool, sealed hot side fans	EXT*	NEMA-4, IP 56
AHP-2259XEHC†	0-H4LB-5-000	Heat/Cool, sealed hot side fans	TC-5300D	NEMA-4. IP 56

<sup>†</sup> Precise temperature control model

<sup>\*</sup> Unit is set for 5-32 VDC external signal, relay(s) included

#### PERFORMANCE CURVE

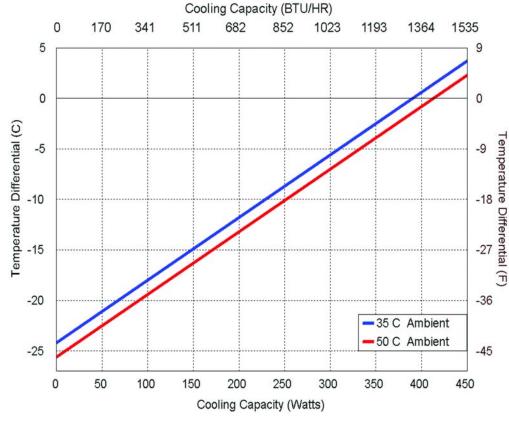

Equation of line: $y=\Delta T(^{\circ}C)$ x=Capacity (Watts)				
Ambient Temp	35°C	50°C		
Enclosure Air	y=.062x-24.2	y=.062x-25.6		
Cold Sink	y=.046x-24.2	y=.046x-25.6		

## **AHP-2259**

#### **MOUNTING STYLE**

Through Mounted

#### **ENVIRONMENTS SERVED**


NEMA-12 IP 52 NEMA-4 IP 56

### RATING (TRADITIONAL)

1330 BTU/hr @ 0 °F  $\Delta$ T

#### RATING (DIN 3168)

390 Watts L35 L35 170 Watts L35 L50

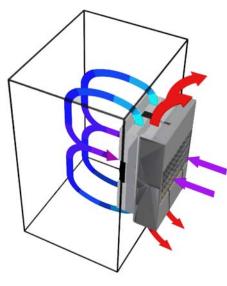

Air Flow Pattern

#### **DIMENSIONS** MOUNTING CUTOUT DIMENSIONS 6.10[155] 6.10[155] 8.66 220 13.02[331] 11.08[281] 2.03[52] 2.03[52] 4.64[118] 9.45 [240] -4.95[126] -- 4.95[126] -cold Side (Enclosure) Air Flow Pattern Hot Side (Ambient) Air Flow Pattern 18.62 [473] 15.82 [402] 20.52[521] 9.45 [240] 9.89 [251] 5.59[142] --- 5.59[142] --External Hot side Fans 14 X Ø 0.218 [6]

Dimensions do not include hardware Mounting hardware and gasket included but not shown Dimensions: Inches [Millimeters]