

Product Information Packet

Model AHP-1201XP-1

NEMA 4-X, Class I Div 2, Cool Only Solid State Air Conditioner

set up for Remote Drive Signal

Part #0-3071-2-012

Thank you for your purchase. Information has been enclosed regarding the installation, specifications, and wiring of your solid-state assembly. Please read and follow all instructions carefully before installation. Only qualified technicians should install this equipment.

If you have any questions regarding your equipment, please do not hesitate to call us at 773-342-4900, and we will be happy to assist you. We are open from 8:00 am-4:30 pm Central Time.

Included in this packet you will find:

Installation Notes for Air Conditioners

Product Literature and Specifications

Assembly Drawing # 1200-B-A13

Wiring Drawing # SK170420

Installation Drawing # 1200-A-F60

Warranty Information

The logo for Teca, featuring the word "teca" in a bold, lowercase, sans-serif font. The letter "t" is stylized with a vertical line extending upwards from its stem.


ThermoElectric Cooling America Corporation
4048 W. Schubert Avenue • Chicago, IL (U.S.A.) 60639
Ph: 773/342-4900 Fx: 773/342-0191
sales@thermoelectric.com www.thermoelectric.com

Important Installation Notes for Air Conditioners

Mounting Styles: Both 'thru mount' and 'flush mount' units can be positioned in any orientation and on any enclosure surface. It is important to consider interior air flow patterns when determining the mounting location. Also of importance is an unrestricted flow of ambient air thru the hot side heat exchanger. Ease of access and inspection must be considered for those applications in particularly severe environments which may require occasional maintenance.

Vertical (Side/Front/Back) Mounting:

Vertical mounting refers to the vertical direction of the cold side or interior fins and is recommended for applications with high humidity, poor and incomplete cabinet seals or any condition which may cause the cold side fins to be maintained at temperatures below the dew point for long periods of time allowing for the formation of condensation. The vertical fin direction provides a drip path whereupon condensation can be collected via a moisture removal system (standard on FHP-units) or a drip pan positioned below the cold side fins. Drip pans are optional for thru mount units.

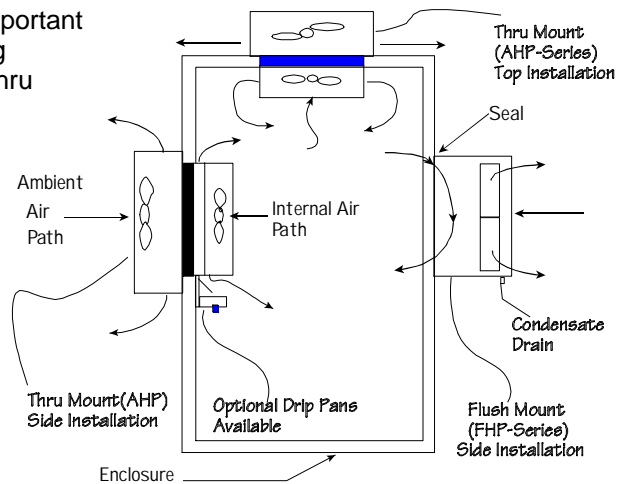

Condensate Removal System:

All FHP-Series and AHP-1400 air conditioners contain a built-in condensate removal system. The condensate kit consists of a antifungal sponge with a condensate wick. PVC tubing is also provided for drainage. Drip pans are optional for thru mount units which must be evaluated on an individual basis. Equations defining a relationship between the cold side fin and enclosure temperatures are provided to assist in the evaluation.

Top Mounting:

Though often the easiest location to mount it is often the most difficult to protect from condensation in this orientation due to the fin orientation, gravity and any susceptible components below. If a drip pan is employed by the end user use caution to place the pan far enough away from the internal fan to minimize the restriction of air flow. The pan should cover the fin ends as well as the fan area. When there is a choice, the vertical orientation is preferred by most users.

Maintenance:

Since the technology is solid-state, there are no filters, compressors, or fluorocarbons to maintain. The only moving parts are the fans. It is recommended for harsh or dirty environments that the heat sinks be cleaned from time to time. This can be accomplished by directing compressed air over the external fins or on NEMA 4 versions by hosing the unit down. This will increase the overall life and performance of the system.

Cautions:

Take care when mounting not to damage the seal between the hot and cold side sinks. Do not attempt to mount a unit to a warped surface or try to make the units mounting surface conform to an unflat surface. Do not pinch or damage any leads when mounting. Do not over tighten any installation screw, use reasonable force. Always mount with any condensate drain down. Do not compress the cold side between the hot side and any other surface. Do not obstruct the airflow on either side. When mounting consider the natural air flows of the enclosure. Connect power only after the installation is complete.

Notes on condensation:

Condensation occurs at the cold side fins when the surface temperature goes below the dew point. To reduce or remove condensate, consider the following:

- Regulate the Fin Temperature above the Dewpoint.
- Keep Enclosure Closed and Sealed from Outside Humidity.
- Use Desiccant (Moisture absorbing Granules.)
- Employ Condensate Removal System/Drip Pans.

If you have any questions regarding your installation, Please feel free to contact our technical department for assistance at 773-342-4900.

AHP-1200

Hazardous Location Air Conditioner

Air Cooled
Through Mounted
NEMA-12, 4X, Class I Div 2

120 VAC, 240 VAC Input
530 BTU/HR
Hazardous Location

FEATURES

- Compact, (only 15" L X 7.35" W X 8.17" D)
- Weighs only 21 lbs. (9.5 kg)
- Excels in high ambient temperatures
- Environmentally safe
- Dual voltage versions available
- No compressor, fluorocarbons or filters
- Virtually maintenance-free operation
- Stainless steel exterior housing
- Versions to withstand corrosive environments, shock and vibration
- Mounts and operates in any orientation
- Easy to use Pivot Clean feature
- Agency Approvals: UL 1604, UL 1995, CSA 22.2
- Groups A, B, C, D

INCLUDES

- Temperature control
- Gasket and mounting hardware
- Power input line cord

OPTIONS

- Other temperature settings for single set point controls
- Custom finishes



SPECIFICATIONS

MODEL	PART NUMBER	VOLTAGE VAC 50/60HZ	CURRENT AMPS.	WEIGHT LBS.(KG)	TEMP. CONTROL	OPERATING AMBIENT TEMPERATURE AMBIENT °C	OPERATING ENCLOSURE TEMPERATURE RANGE °C	ENVIRONMENT
AHP-1200EP	0-3080-0-003	120	4.0	21(9.5)	TC-6F	-40/+63	-10/+60	NEMA-12
AHP-1200EP	0-30F0-0-004	120	4.0	21(9.5)	85°F (30°C)	-40/+63	-10/+60	NEMA-12
AHP-1200EP-1	0-3070-0-010	120	4.0	21(9.5)	EXT*	-40/+63	-10/+60	NEMA-12
AHP-1200EPHC	0-3030-1-007	120	4.0	21(9.5)	TC-3F	-40/+63	-10/+60	NEMA-12
AHP-1200EPHC-1	0-3070-1-009	120	4.0	21(9.5)	EXT*	-40/+63	-10/+60	NEMA-12
AHP-1201EP	0-3081-0-003	120/240	4.0/2.0	29(13.2)	TC-6F	-40/+63	-10/+60	NEMA-12
AHP-1201EP	0-30F1-0-004	120/240	4.0/2.0	29(13.2)	85°F (30°C)	-40/+63	-10/+60	NEMA-12
AHP-1201EP-1	0-3071-0-010	120/240	4.0/2.0	29(13.2)	EXT*	-40/+63	-10/+60	NEMA-12
AHP-1201EPHC	0-3031-1-007	120/240	4.0/2.0	29(13.2)	TC-3F	-40/+63	-10/+60	NEMA-12
AHP-1201EPHC-1	0-3071-1-009	120/240	4.0/2.0	29(13.2)	EXT*	-40/+63	-10/+60	NEMA-12
AHP-1200XP	0-3080-2-003	120	4.0	21(9.5)	TC-6F	-40/+71	-10/+60	NEMA-4X
AHP-1200XP	0-30F0-2-004	120	4.0	21(9.5)	85°F (30°C)	-40/+71	-10/+60	NEMA-4X
AHP-1200XP-1	0-3070-2-010	120	4.0	21(9.5)	EXT*	-40/+71	-10/+60	NEMA-4X
AHP-1200XPHC	0-3030-3-007	120	4.0	21(9.5)	TC-3F	-40/+71	-10/+60	NEMA-4X
AHP-1200XPHC-1	0-3070-3-009	120	4.0	21(9.5)	EXT*	-40/+71	-10/+60	NEMA-4X
AHP-1201XP	0-3081-2-014	120/240	4.0/2.0	29(13.2)	TC-6F	-40/+71	-10/+60	NEMA-4X
AHP-1201XP	0-30F1-2-020	120/240	4.0/2.0	29(13.2)	85°F (30°C)	-40/+71	-10/+60	NEMA-4X
AHP-1201XP-1	0-3071-2-012	120/240	4.0/2.0	29(13.2)	EXT*	-40/+71	-10/+60	NEMA-4X
AHP-1201XPHC	0-3031-3-011	120/240	4.0/2.0	29(13.2)	TC-3F	-40/+71	-10/+60	NEMA-4X
AHP-1201XPHC-1	0-3071-3-013	120/240	4.0/2.0	29(13.2)	EXT*	-40/+71	-10/+60	NEMA-4X

* Unit is set for 5-32 VDC external signal, relay(s) included

AHP-1200EP

MOUNTING STYLE

Through Mounted

ENVIRONMENTS SERVED

Class 1 Div 2 NEMA-12 IP 52

Class 1 Div 2 NEMA-4X IP 56

RATING (TRADITIONAL)

530 BTU/hr @ 0 °F ΔT


670 BTU/hr @ +20 °F ΔT

RATING (DIN 3168)


154 Watts L35 L35

100 Watts L35 L50

PERFORMANCE CURVE

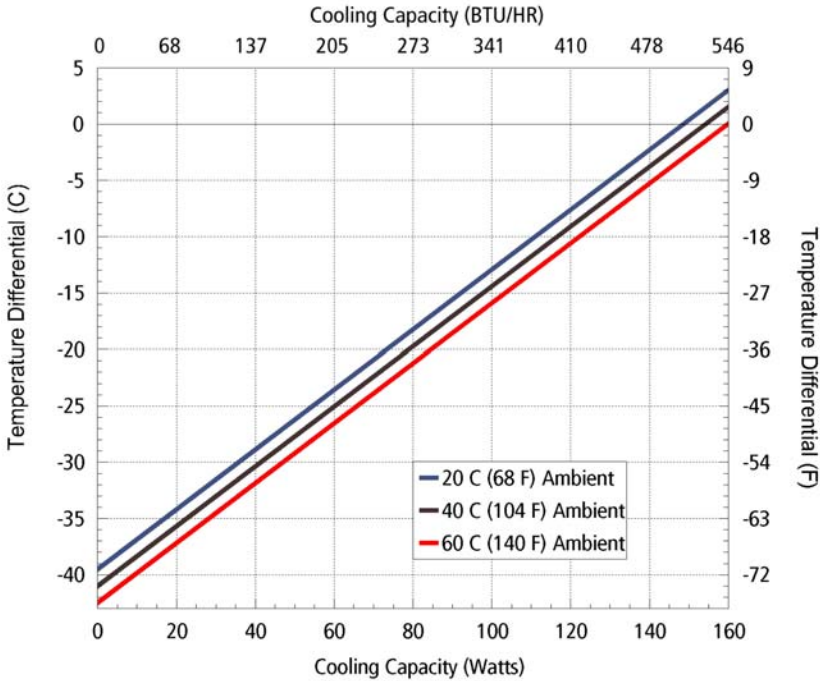


Equation of line: $y = \Delta T(^{\circ}C)$ $x = \text{Capacity (Watts)}$			
Ambient Temp	20°C	40°C	60°C
Enclosure Air	$y = .266x - 39.5$	$y = .266x - 41.0$	$y = .266x - 42.5$
Cold Sink	$y = .173x - 39.5$	$y = .173x - 41.0$	$y = .173x - 42.5$

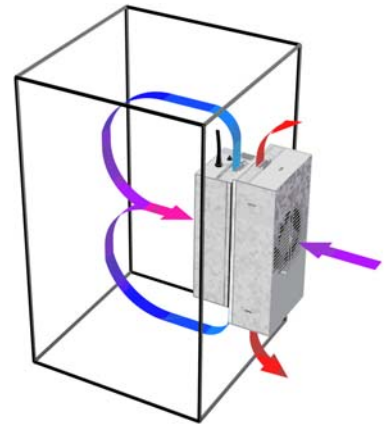


Air Flow Pattern

DIMENSIONS

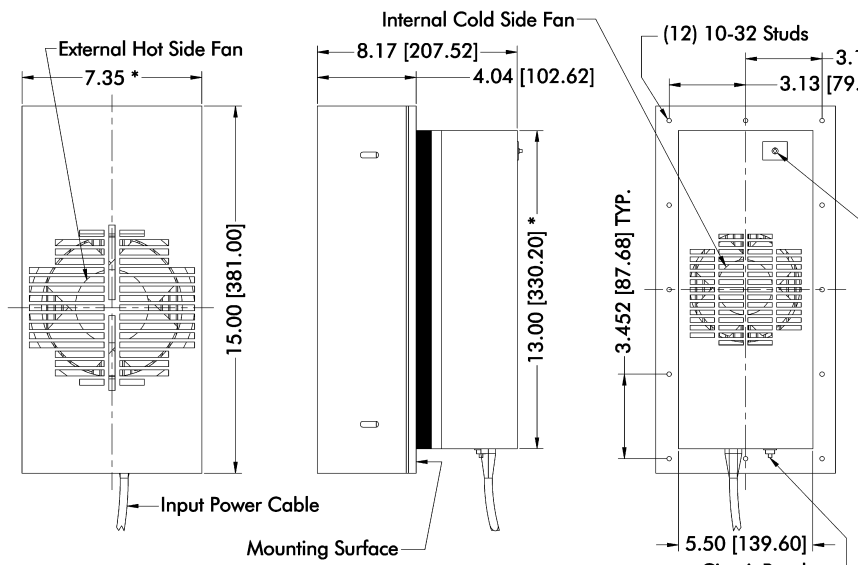


MOUNTING CUTOUT DIMENSIONS

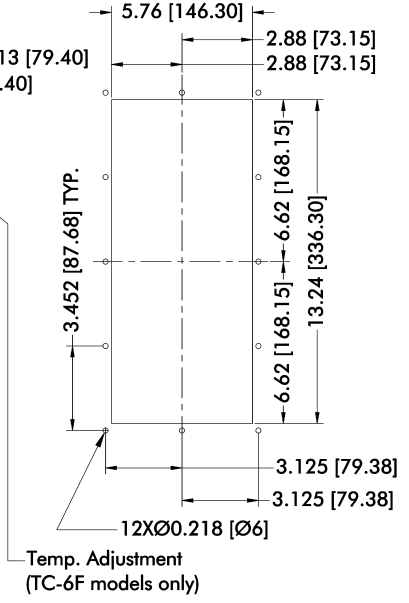

* Dimension does not include hardware and sealant.
Mounting hardware and gasket included but not shown.
Dimensions: Inches [Millimeters]


LTR	DESCRIPTION	DATE	APPROVED
A	CHANGED NUMBER OF STUDS AND DRAWING NUMBER	12-10-88	T. Z.
B	ADD METRIC DIMENSIONS	03.23.90	I.N.

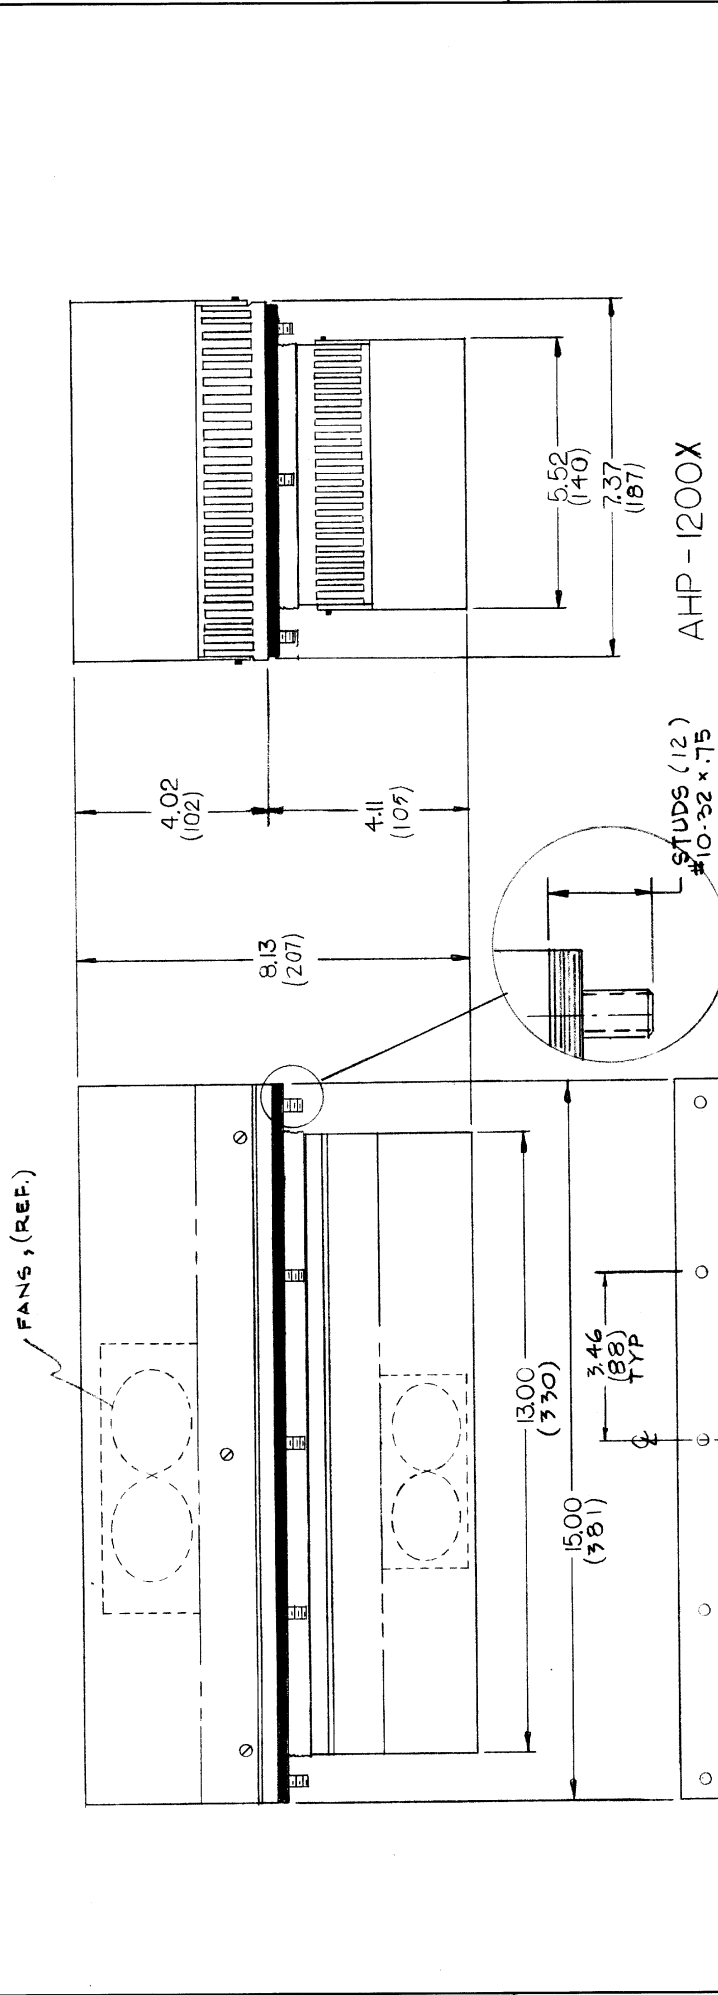

NOTE: DIMENSIONS IN INCHES (MILLIMETERS)

ThermoElectric Cooling America Corp.		DRAWING NO. 1200-B-A.13	
AHP-1200 ASSEMBLY FOR LITERATURE		SIZE B	SHEET 10700 OF
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:</small> + .XX ± .XXX ±		DATE 2-11-88	
MATERIAL		APPROVALS	CHECKED
FINISH		DRAWN G.M.	
SCALE 1" = 3/8"			

GASKET, INCLUDED

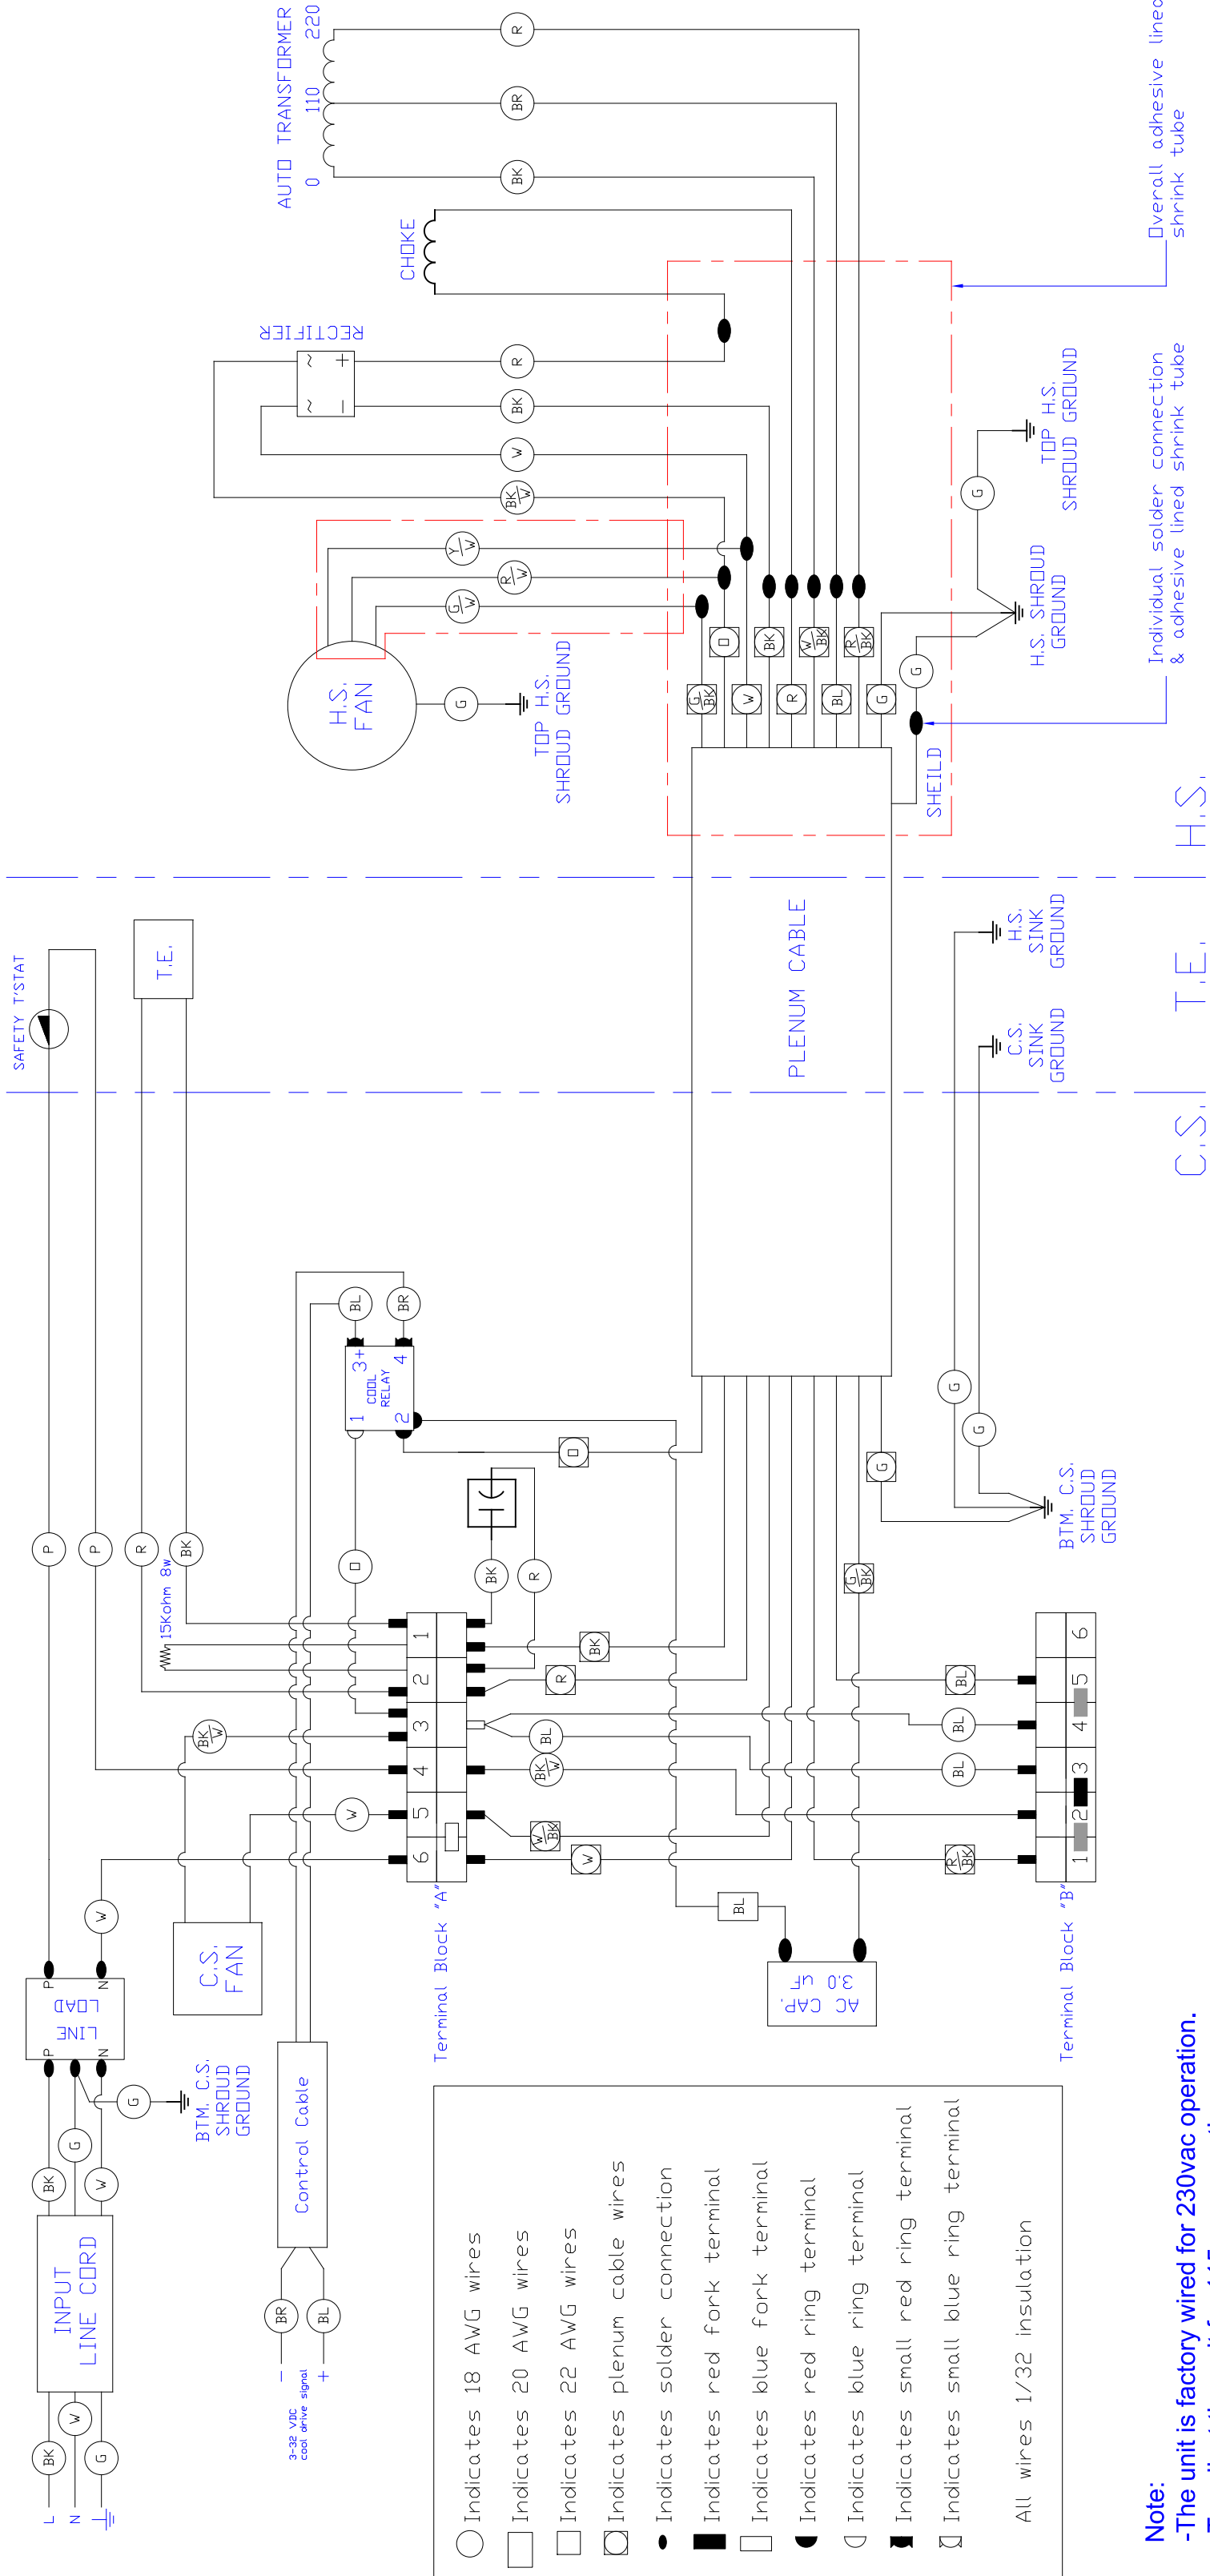

- Indicates 18 AWG wires
- Indicates 20 AWG wires
- Indicates 22 AWG wires
- Indicates plenum cable wires
- Indicates solder connection
- Indicates red fork terminal
- Indicates blue fork terminal
- Indicates red ring terminal
- Indicates blue ring terminal
- Indicates small red ring terminal
- Indicates small blue ring terminal
- All wires 1/32 insulation

Note:
 -The unit is factory wired for 230vac operation.
 -To adjust the unit for 115vac operation:
 1) Remove (2) 230vac operation jumpers (shown as ■) from terminals 1-2 and terminals 4-5 on terminal block "B".
 2) Install (1) 115vac operation jumper (shown as ■) between terminals 2-3 on terminal block "B".





-Do not remove or relocate fixed terminal jumper (shown as □) between terminals 5-6 on terminal block "A".

THERMOELECTRIC COOLING AMERICA CORP.	
AHP-1201XP-1	
WIRING DIAGRAM	
DRAWN BY: AA	DRAWING # SK170420
DATE: 04/13/2017	SCALE
S0949	MASTER: Master
REV LEVEL B	SHEET

INFORMATION DISCLOSED HEREIN IS THE CONFIDENTIAL PROPERTY OF TECA CORP. RECIPIENT SHALL NOT USE THE INFORMATION IN ANY UNAUTHORIZED MANNER.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS +/− .XX +/− .XXX +/− MATERIAL: ANGLE +/− FRACTION +/−	06/07/2011	AA	APPROVED
		12/01/2023	AA	
FINISH:		Date	DESCRIPTION	
A Added EMI filter.				
B Revised wiring to accommodate for LMB fan.				

Mounting, Montage, Montaggio

Enclosure, Armoire, Gehäuse, Armadi

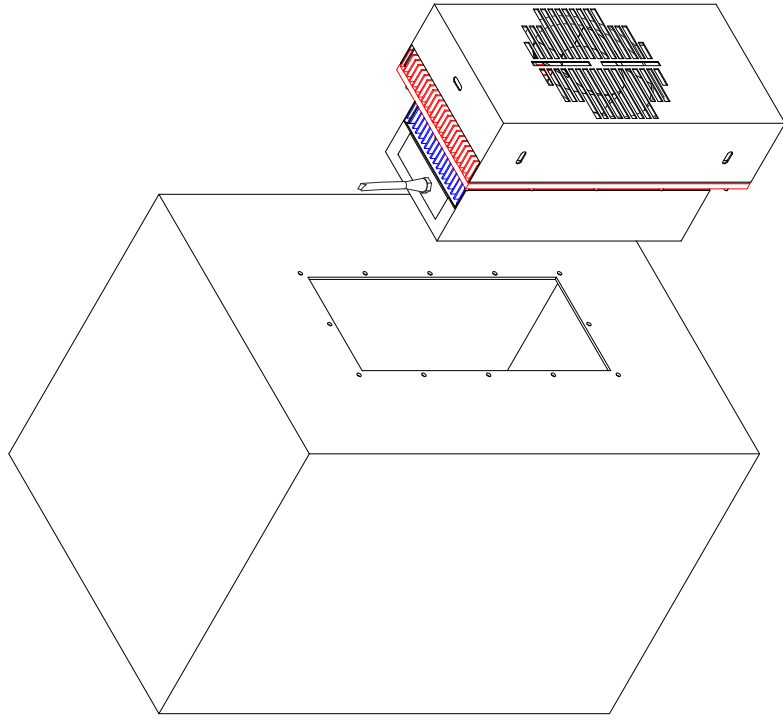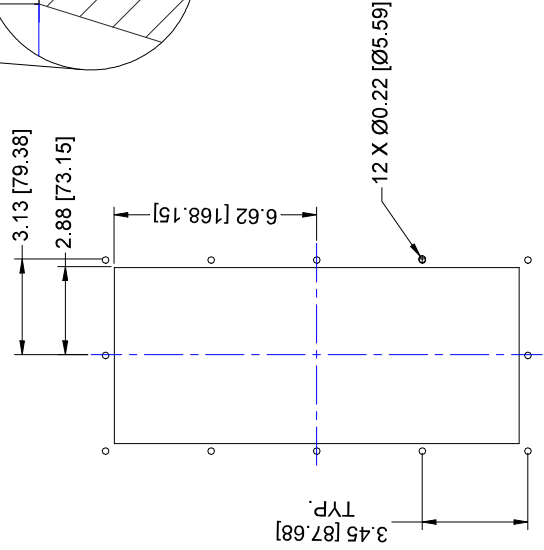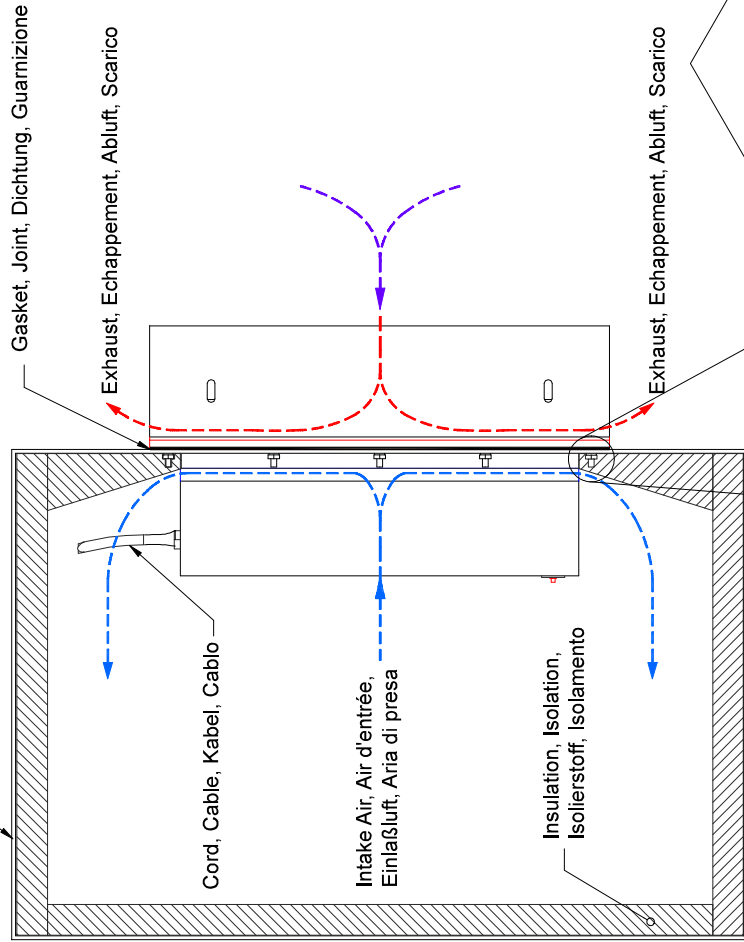

Alternate, Alternative, Alternativa

English, Français, Deutsch, Italiano
Dimensions: Inches [Millimeters]

Warning - This equipment is suitable for use in Class I Division 2, Groups A, B, C, D or Non-Hazardous locations only.
 Warning - Explosion Hazard - Substitution of components may impair suitability for Class I, Division 2.
 Avertissement - Risque D'Explosion - La substitution de composants peut rendre ce matériel inacceptable pour les emplacements de Classe I, Division 2.
 Achtung - Explosionsgefahr - Das Austauschen von Komponenten kann die Eignung für Klasse I, Division 2 beeinträchtigen.
 Attenzione - Pericolo di esplosione - La sostituzione di componenti può compromettere per la Classe I, Divisione 2.

REV	DESCRIPTION	Date	APPROVED	AA	FINISH:	MATERIAL:	DECIMALS .XX +/-	ANGLE +/-	FRACTION +/-	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	THERMOELECTRIC COOLING AMERICA CORP.			
											AHP-1200EP / AHP-1200XP SERIES TYPICAL FIELD MOUNTING	DRAWING # 1200-A-F60	REV LEVEL A	
A	Changed AHP-1200P to AHP-1200EP in title block.	08/17/2011	AA	AA	INFORMATION DISCLOSED HEREIN IS THE CONFIDENTIAL PROPERTY OF TECA CORP. RECIPIENT SHALL NOT USE THE INFORMATION IN ANY UNAUTHORIZED MANNER.						DRAWN BY: AA	DRAWING # 1200-A-F60	REV LEVEL A	
											DATE: 04/18/2011	SCALE D8028	MASTER: MASTER	SHEET

LIMITED WARRANTY

In the event a defect in material or workmanship is discovered in any of TECA's products within one year after the date they are delivered to Buyer, and if: (a) TECA is notified of the defect in writing by certified mail within 14 days of the date of discovery; (b) TECA may then either, at its sole discretion, inspect the product at Buyer's location, or require that the product be made available at Buyer's expense at TECA's premises for TECA's inspection within 14 days of the date of notification; and (c) the products are defective and the defects result from faulty materials and/or workmanship and not in any way from accident, misuse, misapplication, mishandling, modification, or alteration by the Buyer or the shipper, then TECA shall, at its sole option, repair or exchange defective products free of charge to Buyer, or credit to buyer the price of the defective products. ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARE EXCLUDED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL TECA BE LIABLE FOR ANY CLAIM BASED UPON BREACH OF EXPRESS OR IMPLIED WARRANTY OR ANY OTHER DAMAGES WHETHER SPECIAL, INDIRECT, INCIDENTAL, CONSEQUENTIAL, LOST PROFITS, BUSINESS INTERRUPTION, OR LOSS OF BUSINESS OR CUSTOMER RELATIONSHIPS.

RETURNED GOODS, RESTOCKING CHARGES

In order to return merchandise for any reason (repair, replacement, or credit) a return authorization number must be issued by TECA. New merchandise may not be returned for credit beyond 60 days from shipment. Charges for incidental or other damages may also be made. All returned goods must be sent freight prepaid. A restocking charge of 15% will apply. On special equipment and custom modified equipment orders, additional incremental cancellation charges may be made.