

FHP-6253

Air Conditioner/Heat Exchanger

Air Cooled
Flush Mounted
Nema-12, 4, 4X

3 Phase, 240 VAC, 3 Wire Delta
High Capacity
4830 BTU/HR

FEATURES

- High capacity thermoelectric design
- Power saving air to air heat exchanger (ECO-mode)
- Heavy duty full perimeter mounting
- No intrusion into enclosure
- Central input cord for easy mounting
- Closed loop design
- Condensate control and evaporation system
- Increased efficiency at higher ambients by as much as 10%
- Virtually maintenance free
- No compressor
- Environmentally friendly and safe
- Stainless Steel exterior housing
- Mounts and operates in any orientation
- Integral temperature controller
- Weight 180 LBS.

CONTROL TEMPERATURES

Active Cooling	35 °C
Heat Exchanger (ECO-Mode)	25 °C
Active Heating	10 °C
Typical Hysteresis	5 °C
Operating Ambient	-40/+65 °C
Operating Enclosure	-10/+60 °C

POWER INPUTS

Voltage, 3 Phase Delta	240 VAC
Current, Active	5.5 AMPS
Current , ECO-Mode	1.5 AMP
Frequency	50/60 Hz


PERFORMANCE RATINGS

Cooling (Traditional)	4830 BTU/HR
Cooling (Din 3168)	1416 WATTS
Cooling COP (at L35 L35)	0.62
Heating (Traditional)	> 7800 BTU/HR
Heating (Din 3168)	> 2290 WATTS
Heating COP	> 1.0
Heat Exchanger (ECO-mode)	45 W/°C



INCLUDES

- Power supply
- Temperature controller
- Power saving heat exchanger mode (ECO-Mode)
- Mounting gasket
- Mounting hardware
- Power input cord
- Circuit breaker

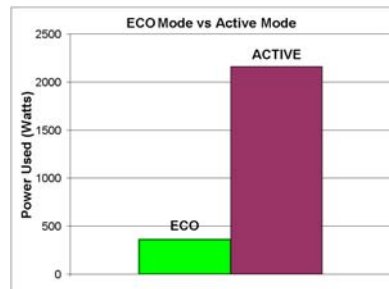

250 VDC configuration for crane applications available

CONFIGURATIONS

MODEL	PART NUMBER	NOTES	TEMPERATURE CONTROL	ENVIRONMENT
FHP-6253	7-K4JD-0-000	Cool only, industrial fans & power supply	TC-4F	NEMA-12, IP 52
FHP-6253	7-K45D-0-000	Cool only, industrial fans & power supply	EXT*	NEMA-12, IP 52
FHP-6253HC	7-K4ID-1-000	Heat/Cool, industrial fans & power supply	TC-7F	NEMA-12, IP 52
FHP-6253HC	7-K45D-1-000	Heat/Cool, industrial fans & power supply	EXT*	NEMA-12, IP 52
FHP-6253XE	7-K4JD-4-000	Cool only, sealed hot side fans & power supply	TC-4F	NEMA-4/4X, IP 56
FHP-6253XE	7-K45D-4-000	Cool only, sealed hot side fans & power supply	EXT*	NEMA-4/4X, IP 56
FHP-6253XEHC	7-K4ID-5-000	Heat/Cool, sealed hot side fans & power supply	TC-7F	NEMA-4/4X, IP 56
FHP-6253XEHC	7-K45D-5-000	Heat/Cool, sealed hot side fans & power supply	EXT*	NEMA-4/4X, IP 56
FHP-6253X	7-K4JD-2-000	Cool only, Mil. grade hot side fans & power supply	TC-4F	NEMA-4X/Harsh, IP 56
FHP-6253X	7-K45D-2-000	Cool only, Mil. grade hot side fans & power supply	EXT*	NEMA-4X/Harsh, IP 56
FHP-6253XHC	7-K4ID-3-000	Heat/Cool, Mil. grade hot side fans & power supply	TC-7F	NEMA-4X/Harsh, IP 56
FHP-6253XHC	7-K45D-3-000	Heat/Cool, Mil. grade hot side fans & power supply	EXT*	NEMA-4X/Harsh, IP 56

* Unit is set for 5-32 VDC external signal, relay(s) included

TECA

1-888-TECA-USA (832-2872)

www.thermoelectric.com

FHP-6263**MOUNTING STYLE**

Flush Mounted

ENVIRONMENTS SERVED

NEMA-12 IP 52

NEMA-4,4X IP 56

RATING (TRADITIONAL)


4830 BTU/hr @ 0 °F ΔT

6410 BTU/hr @ +20 °F ΔT


RATING (DIN 3168)

1416 Watts L35 L35


829 Watts L35 L50

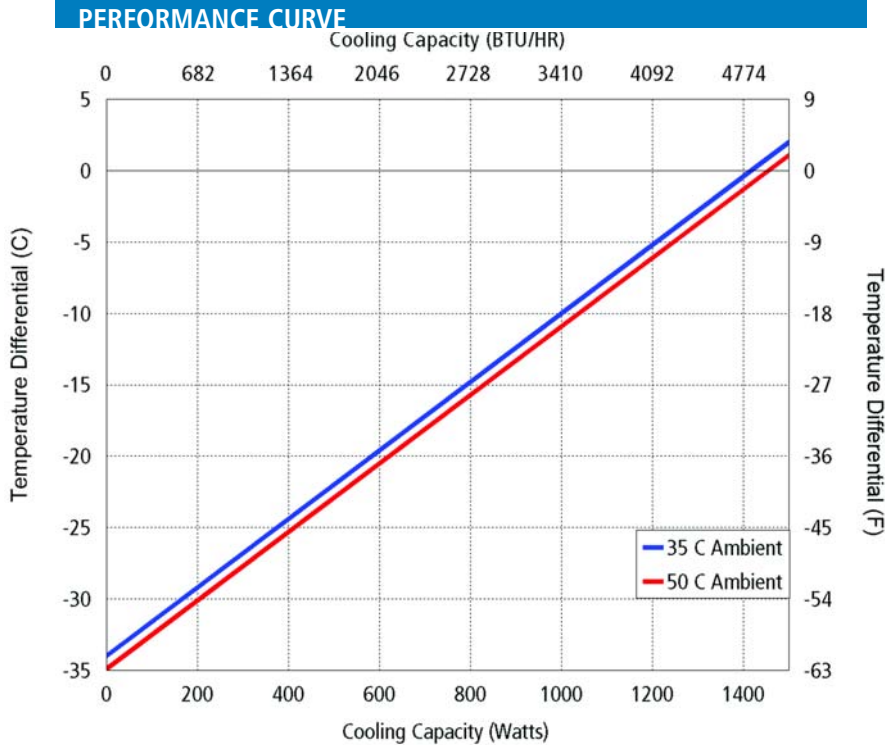

Equation of line: $y = \Delta T(^{\circ}\text{C})$ $x = \text{Capacity (Watts)}$		
Ambient	35 C	50 C
Enclosure Air	$y = .024x - 34$	$y = .024x - 34.9$
Cold Sink	$y = .016x - 34$	$y = .016x - 34.9$

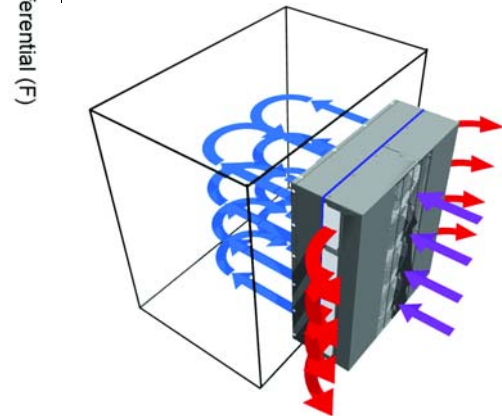

Air Flow Pattern

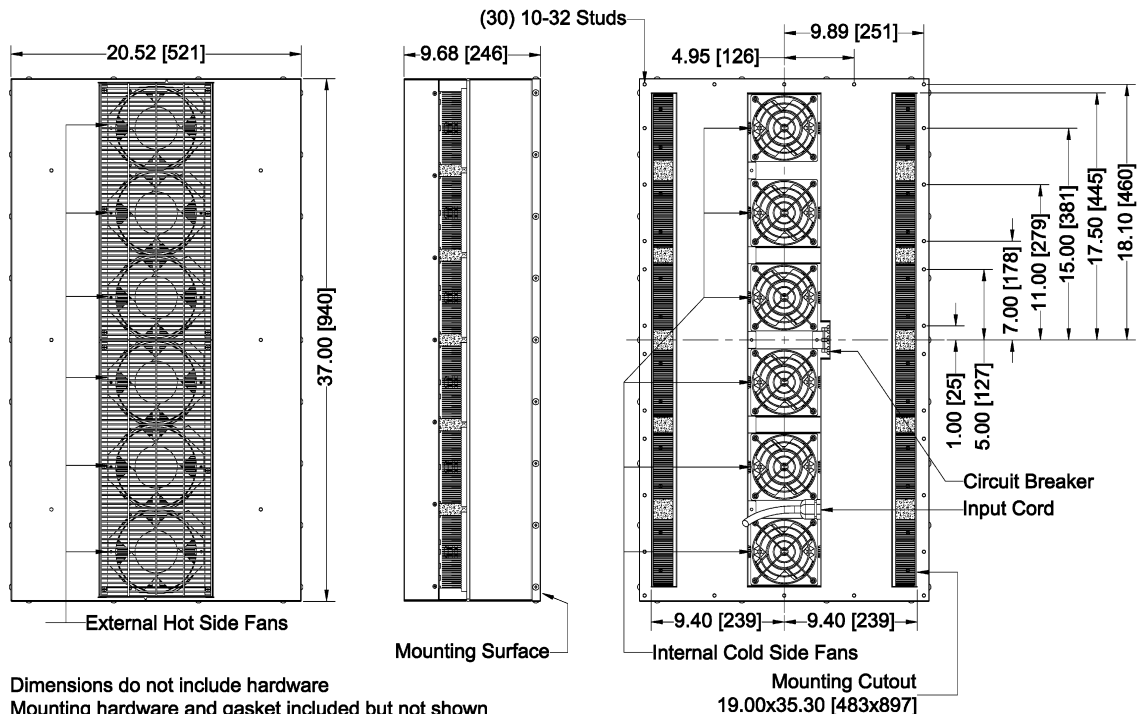DIMENSIONS

Dimensions do not include hardware
Mounting hardware and gasket included but not shown
Dimension: Inches [Millimeters]